



Lexmark XC4140

The Lexmark XC4140 offers workgroup-level printing performance and advanced scanning capabilities in a feature-rich package that's as easy to use as a personal output device.

Part Number

40C9720

Print Technology

Color Laser

Function

Color Copying, Color Faxing, Color Printing, Color Scanning, Color Network Scanning

Workgroup Size

Medium-Large Workgroup

Touch Screen Display

Yes

Display

Lexmark e-Task 7-inch (17.8 cm) color touch screen

Print Speed (Letter, Black)

Up to 40 ppm⁶

Print Speed (Letter, Color)

Up to 40 ppm⁶

Print Speed (Letter, Black) Duplex

Up to 32 spm⁶

Time to First Page (Black)

As fast as 6.0 seconds

Time to First Page (Color)

As fast as 6.5 seconds

Duplex (2-sided) Printing

Integrated Duplex

Print Resolution, Black

1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)

Print Resolution, Color

1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)

Copy Speed (Letter, Black)

Up to 40 cpm⁶

Copy Speed (Letter, Color)

Up to 40 cpm⁶

Time to First Copy (Black)

As fast as 7.0 seconds

Time to First Copy (Color)

As fast as 8.0 seconds

Reduce / Enlarge Range

25 - 400 %

A4/Ltr Simplex Scan Speed (Black)

Up to 56 / 60 sides per minute

A4/Ltr Simplex Scan Speed (Color)

Up to 56 / 60 sides per minute

A4/Ltr Duplex Scan Speed (Black)

Up to 26 / 28 sides per minute

A4/Ltr Duplex Scan Speed (Color)

Up to 26 / 28 sides per minute

Scan Area, Maximum

8.5 x 14 inches

ADF Scan

RADF (Reversing Duplex)

Scanner Type

Flatbed scanner with ADF

Scan Technology

CCD

Optical Scanning Resolution

300 X 300 ppi (color), 600 X 600 ppi (black)

Scan File Formats (Send as)

JPEG, JPG, PDF, Secure PDF, TIFF, XPS, Archival PDF (A-1a, A-1b), Searchable PDF (optional OCR with 1GB RAM and hard disk required), Highly compressed PDF (1GB RAM and hard disk required)

Scan Destinations

e-mail, FTP, USB Flash drive, USB or Network connected computer, Lexmark Document Solutions Suite (LDSS)

Modem Speed

ITU T.30, V.34 Half-Duplex, 33.6 Kbps

Fax Transmission Speed

< 3 seconds per page

Processor Speed

Quad Core 1.2 GHz

Memory, Standard

2048 MB

Memory, Maximum

4096 MB

Hard Disk

Option available

Apple Operating Systems Supported

Apple OS X (10.6, 10.7, 10.8, 10.9, 10.10, 10.11)

Citrix MetaFrame

Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 with Citrix XenApp 6.0, 6.5

Linux Operating Systems Supported

Debian GNU/Linux 7.0, 8.0, Fedora 21, 22, Linpus Linux Lite Desktop 2.1, Linux Mint 13 LTS, 17 LTS, 17.1 LTS, 17.2 LTS, Linux Mint 2 Debian, PCLinuxOS 2014.12, Red Hat Enterprise Linux WS 4, 5, 6, 7, SUSE Linux Enterprise Desktop 10, 11, 12, SUSE Linux Enterprise Server 10, 11, 12, Ubuntu 12.04 LTS, 14.04 LTS, 15.04, openSUSE 13.1, 13.2, openSUSE Tumbleweed

Microsoft Windows Operating Systems Supported

Windows XP, Windows XP x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1, Windows 10

Novell Operating Systems Supported

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server 2 on SUSE Linux Enterprise Server 10 SP4, Novell Open Enterprise Server 11 on SUSE Linux Enterprise Server 11

UNIX Operating Systems Supported

Sun Solaris x86 10, 11, Sun Solaris SPARC 10, 11, IBM AIX 6.1, 7.1

Included Paper Handling

550-Sheet Input, 100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin

Optional Paper Handling

550-Sheet Tray

Paper Input Capacity, Standard

Up to 650 pages 20 lb or 75 gsm bond

Paper Input Capacity, Maximum

Up to 2300 pages 20 lb or 75 gsm bond

Paper Output Capacity, Standard

Up to 300 pages 20 lb or 75 gsm bond

Paper Output Capacity, Maximum

Up to 300 pages 20 lb or 75 gsm bond

Paper Weight Range Supported - Standard Tray (lb.)

16 - 58 lb.

Paper Weight Range Supported - Multipurpose Feeder (lb.)

16 - 58 lb.

Integrated Tray Card Stock Upper limit (grain long)

Index Bristol - 199 gsm (110 lb), Tag - 163 gsm (100 lb), Cover - 176 gsm (65 lb)

Integrated Tray Card Stock Upper limit (grain short)

Index Bristol - 199 gsm (110 lb), Cover - 216 gsm (80 lb), Tag - 203 gsm (125 lb)

ADF

50-Sheet Automatic Document Feeder

ADF Paper Input Capacity

Up to 50 pages 20 lb or 75 gsm bond

ADF Paper Output Capacity

Up to 50 pages 20 lb or 75 gsm bond

Finishing Option

No

Number of Paper Inputs, Standard

2

Number of Paper Inputs, Maximum

5

Media Types Supported

Card Stock, Envelopes, Paper Labels, Plain Paper, Vinyl Labels, Refer to the Card Stock & Label Guide., Banner Paper

Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6

Standard Ports

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB Port Compatible with USB 2.0 Specification (Type A)

Optional Network Ports

Internal MarkNet N8360 802.11b/g/n Wireless, NFC

Direct USB

Yes

Ethernet Network

Yes

Wireless

Wireless Option

Network Protocol Support

TCP/IP IPv4, TCP/IP IPv6, TCP, UDP

Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, TFTP, Telnet, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

Network Management Protocols¹

HTTP, HTTPs (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger,

Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPSec

Printer Languages (Standard)

PCL 5c Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation

Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 165 scalable PostScript fonts, 15 PPDS bitmap fonts

Laser Cartridge Yields (up to)⁵

, 20,000-page Black High Yield Cartridge, 13,000-page Color (CMY) High Yield Cartridges

Imaging Unit Estimated Yield

Up to 150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage⁴

Cartridge(s) Shipping with Product

7,000-page Black and Color (CMYK) Return Program Toner Cartridges

Replacement Cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/ regions for more details.

Packaged Size (in. - H x W x D)

37.6 x 27.6 x 28.9 in.

Packaged Weight (lb.)

141.3 lb.

Size (in. - H x W x D)

25.5 x 19.9 x 21 in.

Weight (lb.)

99 lb.

Noise Level, Idle

15 dBA

Noise Level (Print), Operating

52 dBA

Duplex Print Noise Level, Operating

53 dBA

Noise Level (Copy), Operating

56 dBA

Noise Level (Scan), Operating

54 dBA

ENERGY STAR

Yes

Average Power (Hibernate Mode)

0.2 watts

Average Power (Sleep Mode)

2.5 watts

Average Power (Ready Mode)

90 watts

Average Power (Printing)

574 watts

Average Power (Copying)

455 watts

Average Power (Scanning)

55 watts

ENERGY STAR Typical Electricity Consumption (TEC)

1.95 kilowatt-hours per week

Limited Warranty - See Statement of Limited Warranty

1-Year Parts Only Service

Product Certifications

ENERGY STAR, ICES-003 Class B, BSMI Class B, VCCI Class B, FCC Class B, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC logo, CCC, C-tick DoC, EuP, CECP, CEL, EC 1275/2008, ECMA-370, TED, SII, TER, SABS, UL-AR, GS Mark, Green Dot, ISO-9296, COC, CCD-035 EcoLogo, Green Mark, EPEAT

Maximum Monthly Duty CycleUp to 120000 pages per month³**Recommended Monthly Page Volume**1500 - 15000 pages²**Specified Operating Environment**

Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)

License/Agreement Terms

Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/ printerlicense for details.

Country of Origin

China (PRC)

UNSPSC Code

43212110

Harmonized Tariff Code

8443.31.0000

¹This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)



²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

⁴Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

⁵Average yield at approximately 5% print coverage per colour.

⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

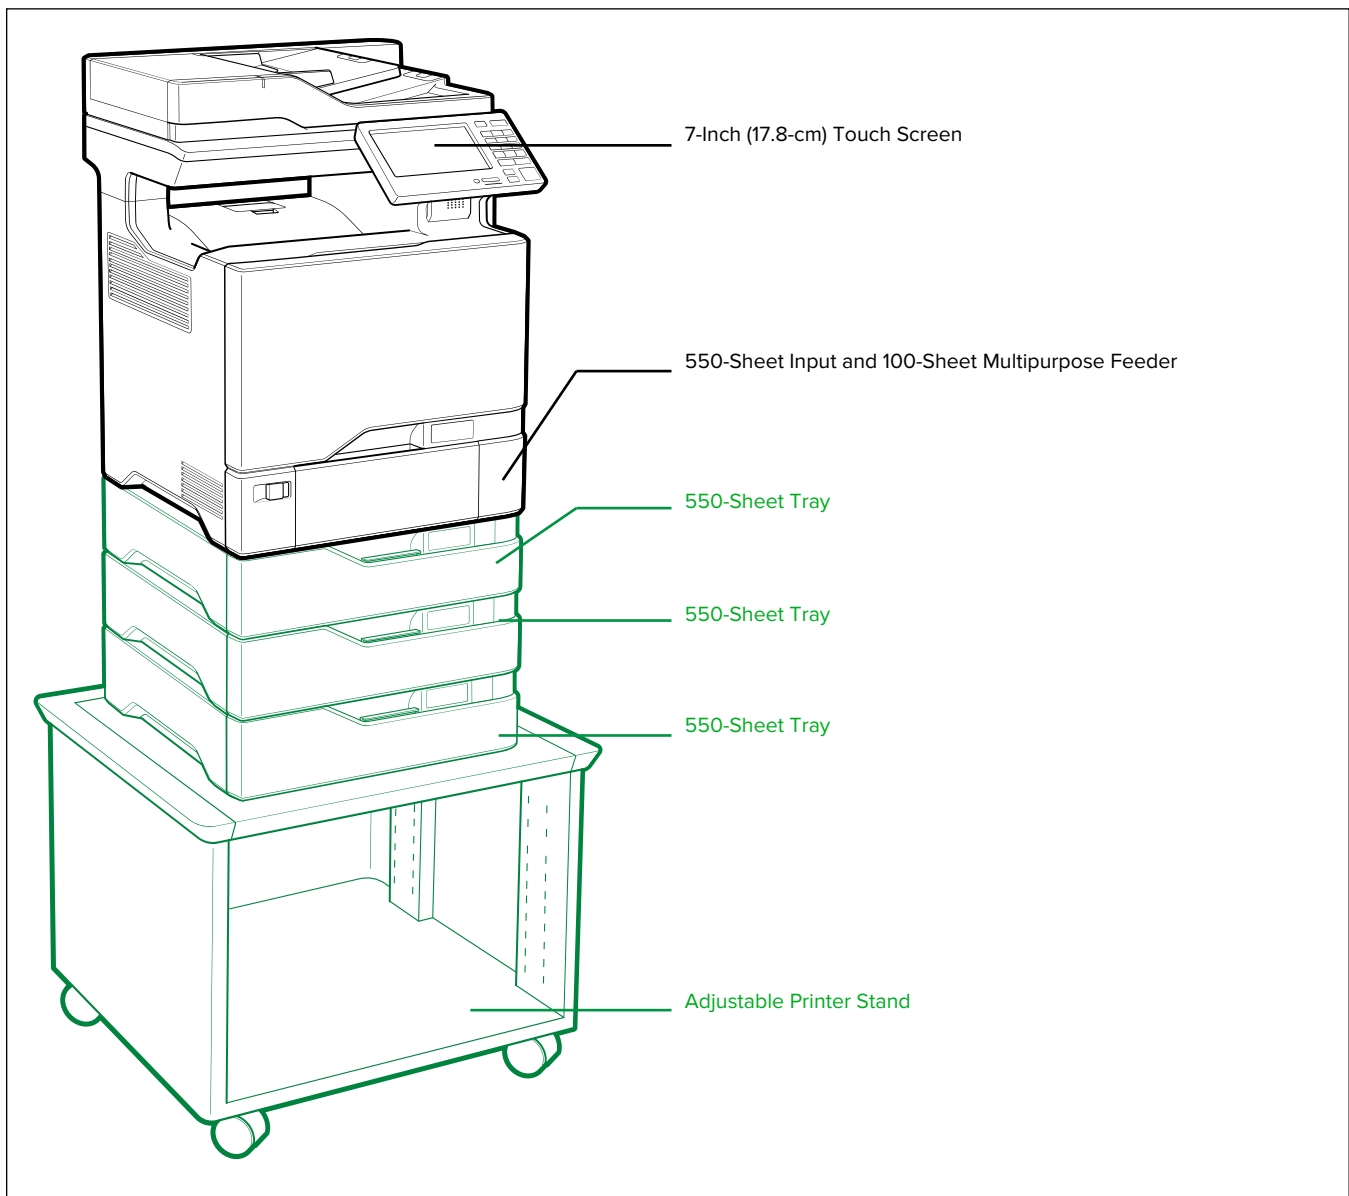

P/N	Toner Cartridges
74C0ZK0	CS720, CS725, CX725 Black Return Program Imaging Unit
74C0ZV0	CS720, CS725, CX725 Color (CMY) Return Program Imaging Kit
74C0W00	Waste Toner Bottle
24B6720	XC4150 Black Toner Cartridge
24B6717	XC4150 Cyan Toner Cartridge
24B6718	XC4150 Magenta Toner Cartridge
24B6719	XC4150 Yellow Toner Cartridge
74C0ZKG	CS720, CS725, CX725 Black Return Program Imaging Unit TAA
74C0ZVG	CS720, CS725, CX725 Color (CMY) Return Program Imaging Kit TAA

P/N	Paper Handling
40C2100	550-Sheet Tray

P/N	Furniture
40C2300	Adjustable Stand

P/N	Memory Options
27X0400	500+ GB Hard Disk
57X9020	2GB x32 DDR3 RAM
57X9801	256MB Flash Memory Card
57X9814	Korean Font Card
57X9815	Japanese Font Card
57X9812	Simplified Chinese Font Card
57X9810	Traditional Chinese Font Card

P/N	Application Solutions
57X0065	OmniKey Authentication Device Kit
40C9201	Card for IPDS
40C9200	Forms and Bar Code Card
40C9202	Card for PRESCRIBE Emulation

P/N	Application Solutions
57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
57X0085	Lexmark Secure Element
57X0310	Contact Authentication Device with Software

P/N	Connectivity
27X0803	MarkNet N8360 Wireless Print Server
27X0812	CS72X, CX72x Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
1021294	USB Cable (2-meter)
SPD0001	Surge Protective Device, 110-120V

P/N	User Replaceable Parts
41X0917	ADF Separator Roll
41X0956	Pick Roller Assembly

P/N **User Replaceable Parts**

41X0554 Fuser Maintenance Kit 110-120V,
Type 00

41X0252 Fuser 110-120V, Type 00

41X0374 Separator Bracket Assembly

P/N **Service Parts**

40X9929 Image Transfer Unit

40X8736 ADF pick roll