



# Lexmark XC9245

Loaded with standard features, the 45-ppm, SRA3/12x18 Lexmark XC9245 supports demanding workloads through a powerful combination of printing, copying, scanning, faxing and optional finishing.

**Part Number**

32C0401

**Print Technology**

Color Laser

**Function**

Color Copying, Color Faxing, Color Printing, Color Scanning, Color Network Scanning

**Workgroup Size**

Large Workgroup

**Touch Screen Display**

Yes

**Display**

Lexmark e-Task 10-inch (25 cm) class color touch screen

**Print Speed (Letter, Black)**

Up to 45 ppm<sup>6</sup>

**Print Speed (Letter, Color)**

Up to 45 ppm<sup>6</sup>

**Print Speed (Letter, Black) Duplex**

Up to 45 spm<sup>6</sup>

**Time to First Page (Black)**

As fast as 5.2 seconds

**Time to First Page (Color)**

As fast as 6.1 seconds

**Duplex (2-sided) Printing**

Integrated Duplex

**Print Resolution, Black**

1200 x 1200 dpi, 2400 Image Quality

**Print Resolution, Color**

1200 x 1200 dpi, 2400 Image Quality

**Copy Speed (Letter, Black)**

Up to 45 cpm<sup>6</sup>

**Copy Speed (Letter, Color)**

Up to 45 cpm<sup>6</sup>

**Time to First Copy (Black)**

As fast as 4.9 seconds

**Time to First Copy (Color)**

As fast as 5.8 seconds

**Reduce / Enlarge Range**

25 - 400 %

**A4/Ltr Simplex Scan Speed (Black)**

Up to 80 / 80 sides per minute

**A4/Ltr Simplex Scan Speed (Color)**

Up to 80 / 80 sides per minute

**A4/Ltr Duplex Scan Speed (Black)**

Up to 160 / 160 sides per minute

**A4/Ltr Duplex Scan Speed (Color)**

Up to 160 / 160 sides per minute

**Scan Area, Maximum**

11.69 x 17.0 inches

**ADF Scan**

DADF (single pass Duplex)

**Scanner Type**

Flatbed scanner with ADF

**Scan Technology**

CCD

**Optical Scanning Resolution**

600 X 600 ppi

**Scan File Formats (Send as)**

JPEG, JPG, PDF, Secure PDF, TIFF, XPS, Archival PDF (A-1a, A-1b), Highly compressed PDF (1GB RAM and hard disk required), Searchable PDF

**Scan Destinations**

e-mail, FTP, USB Flash drive, USB or Network connected computer, Lexmark Document Solutions Suite (LDSS)

**Modem Speed**

ITU T.30, V.34 Half-Duplex, 33.6 Kbps

**Fax Transmission Speed**

< 3 seconds per page

**Processor Speed**

Quad Core 1.2 GHz

**Memory, Standard**

2048 MB

**Memory, Maximum**

4096 MB

**Hard Disk**

Included in configuration

**Apple Operating Systems Supported**

Apple OS X (10.6, 10.7, 10.8, 10.9, 10.10, 10.11)

**Citrix MetaFrame**

Microsoft Windows Server 2008 and 2008 X64 Edition with Citrix XenApp 5.0, Microsoft Windows Server 2008 R2 with Citrix XenApp 6.0, 6.5, Microsoft Windows Server 2012 with Citrix XenApp 6.0, 6.5

**Linux Operating Systems Supported**

Debian GNU/Linux 7.0, 8.0, Fedora 21, 22, Linpus Linux Lite Desktop 2.1, Linux Mint 13 LTS, 17 LTS, 17.1 LTS, 17.2 LTS, Linux Mint 2 Debian, PCLinuxOS 2014.12, Red Hat Enterprise Linux WS 4, 5, 6, 7, SUSE Linux Enterprise Desktop 10, 11, 12, SUSE Linux Enterprise Server 10, 11, 12, Ubuntu 12.04 LTS, 14.04 LTS, 15.04, openSUSE 13.1, 13.2, openSUSE Tumbleweed

**Microsoft Windows Operating Systems Supported**

Windows XP, Windows XP x64, Windows Vista, Windows Vista x64, Windows Server 2008, Windows Server 2008 x64, Windows 7, Windows 7 x64, Windows Server 2008 R2, Windows 8, Windows 8 x64, Windows Server 2012, Windows 8.1, Windows 8.1 x64, Windows Server 2012 R2, Windows RT, Windows RT 8.1, Windows 10

**Novell Operating Systems Supported**

Novell NetWare 6.5 Open Enterprise Server, Novell Open Enterprise Server on SuSE Linux Enterprise Server 10 SP4 (x86 and x64), Novell Open Enterprise Server on SuSE Linux Enterprise Server 11 SP4 (x86 and x64), Novell Open Enterprise Server on SuSE Linux Enterprise Server 12 SP1 (x86 and x64)

**UNIX Operating Systems Supported**

Sun Solaris x86 10, 11, IBM AIX 5.3, 6.1, 7.1, Sun Solaris SPARC 10, 11

**Included Paper Handling**

Integrated Duplex, 250-Sheet Output Bin, 150-Sheet Multipurpose Feeder, 2 x 500-Sheet Input

**Optional Paper Handling**

Staple Finisher, Staple Punch Finisher, 2500-Sheet Tandem Tray, 3000-Sheet Tray, Booklet Finisher, 2 x 500-Sheet Tray

**Paper Input Capacity, Standard**

Up to 1150 pages 20 lb or 75 gsm bond

**Paper Input Capacity, Maximum**

Up to 6650 pages 20 lb or 75 gsm bond

**Paper Output Capacity, Standard**

Up to 250 pages 20 lb or 75 gsm bond

**Paper Output Capacity, Maximum**

Up to 3500 pages 20 lb or 75 gsm bond

**Paper Weight Range Supported - Standard Tray (lb.)**

16 - 47 lb.

**Paper Weight Range Supported - Multipurpose Feeder (lb.)**

16 - 47 lb.

**A3 / 11 x 17**

Yes

**ADF**

100-Sheet Automatic Document Feeder

**ADF Paper Input Capacity**

Up to 100 pages 20 lb or 75 gsm bond

**ADF Paper Output Capacity**

Up to 100 pages 20 lb or 75 gsm bond

**Finishing Option**

Yes

**Finishing Functions**

Offset stacking, Stapling, Hole punching, Booklet fold and saddle stapling

**Number of Paper Inputs, Standard**

3

**Number of Paper Inputs, Maximum**

6

**Media Types Supported**

Card Stock, Envelopes, Labels, Plain Paper, Refer to the Card Stock & Label Guide., Banner Paper

### Media Sizes Supported

10 Envelope, 7 3/4 Envelope, 9 Envelope, A3, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Super Tabloid (12 x 18"), Oficio, A6, SRA3

### Standard Ports

One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Two Front USB 2.0 Specification Hi-Speed Certified port (Type A)

### Optional Local Ports

External RS-232C serial, Internal 1284-B Bidirectional Parallel

### Optional Network Ports

Internal MarkNet N8360 802.11b/g/n Wireless, NFC, MarkNet N8230 Fiber Ethernet Print Server

### Direct USB

Yes

### Ethernet Network

Yes

### Wireless

Wireless Option

### Network Protocol Support

TCP/IP IPv4, TCP/IP IPv6, TCP, UDP

### Network Printing Methods

LPR/LPD, Direct IP (Port 9100), Enhanced IP (Port 9400), Secure IP (Port 96xx), FTP, TFTP, ThinPrint .print integration, Telnet, IPP 1.0, 1.1, 2.0 (Internet Printing Protocol), Microsoft Web Services WSD, Pull Printing

### Network Management Protocols<sup>1</sup>

HTTP, HTTPs (SSL/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger,

### Network Security

SNMPv3, 802.1x Authentication: MD5, MSCHAPv2, LEAP, PEAP, TLS, TTLS, IPsec

### Printable Area

0.165, 0.118, 0.118, 0.118 inches of the top, bottom, right and left edges (within)

### Printer Languages (Standard)

PCL 5c Emulation, PCL 6 Emulation, Personal Printer Data Stream (PPDS), PostScript 3 Emulation, Direct Image, Microsoft XPS (XML Paper Specification), AirPrint™, PDF 1.7 emulation

### Fonts and Symbol Sets

3 of 9 scalable PCL 5e fonts in Narrow, Regular and Wide, 2 PCL bitmap fonts, 39 scalable PPDS fonts, 84 scalable PCL fonts, OCR-A, OCR-B scalable PCL 5e fonts, For more information, refer to the Technical Reference., 165 scalable PostScript fonts, 15 PPDS bitmap fonts

### Laser Cartridge Yields (up to)<sup>5</sup>

, 30,000-page Black and Colour (CMYK) Cartridges

### Photoconductor Estimated Yield

Up to 100000 Black / 90000 (CMY) pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage<sup>4</sup>

### Cartridge(s) Shipping with Product

18,500-page Black Toner Cartridge, 11,500-page Colour (CMY) Toner Cartridges

### Replacement Cartridges:

Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/](http://www.lexmark.com/) regions for more details.

### Packaged Size (in. - H x W x D)

49.1 x 29.8 x 35.9 in.

### Packaged Weight (lb.)

293 lb.

### Size (in. - H x W x D)

36.3 x 24.2 x 27.4 in.

### Weight (lb.)

239.2 lb.

### Size, Trays Extended (in. - H x W x D)

51.44 x 37.5 x 49.07 in.

### Noise Level, Idle

26 dBA

### Noise Level (Print), Operating

52 dBA

### Duplex Print Noise Level, Operating

53 dBA

### Noise Level (Copy), Operating

56 dBA

### Noise Level (Scan), Operating

53 dBA

### ENERGY STAR

Yes

### Average Power (Hibernate Mode)

0.2 watts

### Average Power (Sleep Mode)

2.9 watts

### Average Power (Ready Mode)

230 watts

### Average Power (Printing)

1000 watts

### Average Power (Copying)

1075 watts

### Average Power (Scanning)

250 watts

### ENERGY STAR Typical Electricity Consumption (TEC)

3.8 kilowatt-hours per week

### Limited Warranty - See Statement of Limited Warranty

1-Year Onsite Service, Next Business Day

### Product Certifications

ENERGY STAR, ICES-003 Class A, BSMI Class A, VCCI Class A, FCC Class A, NOM-032, UL, cUL, NOM, US FDA/CDRH, IEC 60825-1, CB Report, ISO-532B, CE (EU) DoC, EFTA (CE), KC logo, CCC, C-tick DoC, EuP, CECP, CEL, EC 1275/2008, ECMA-370, TED, SII, TER, SABS, UL-AR, GS Mark, Green Dot, ISO-9296, COC, CCD-035 EcoLogo, Green Mark, EPEAT, Blue Angel (Blauer Engel)

### Maximum Monthly Duty Cycle

Up to 225000 pages per month<sup>3</sup>

### Recommended Monthly Page Volume

6000 - 50000 pages<sup>2</sup>

### Specified Operating Environment

Altitude: 0 - 2500 Meters (8,200 Feet), Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 30°C (50 to 86°F)

### License/Agreement Terms

Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/](http://www.lexmark.com/) printerlicense for details.

### Country of Origin

China (PRC)

### UNSPSC Code

43212110

### Harmonized Tariff Code

8443.31.0000

### Developer Unit(s) Estimated Yield

Up to 600000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage

<sup>1</sup>This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)


<sup>2</sup>"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

<sup>3</sup>"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

<sup>4</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity.

<sup>5</sup>Average yield at approximately 5% print coverage per colour.

<sup>6</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

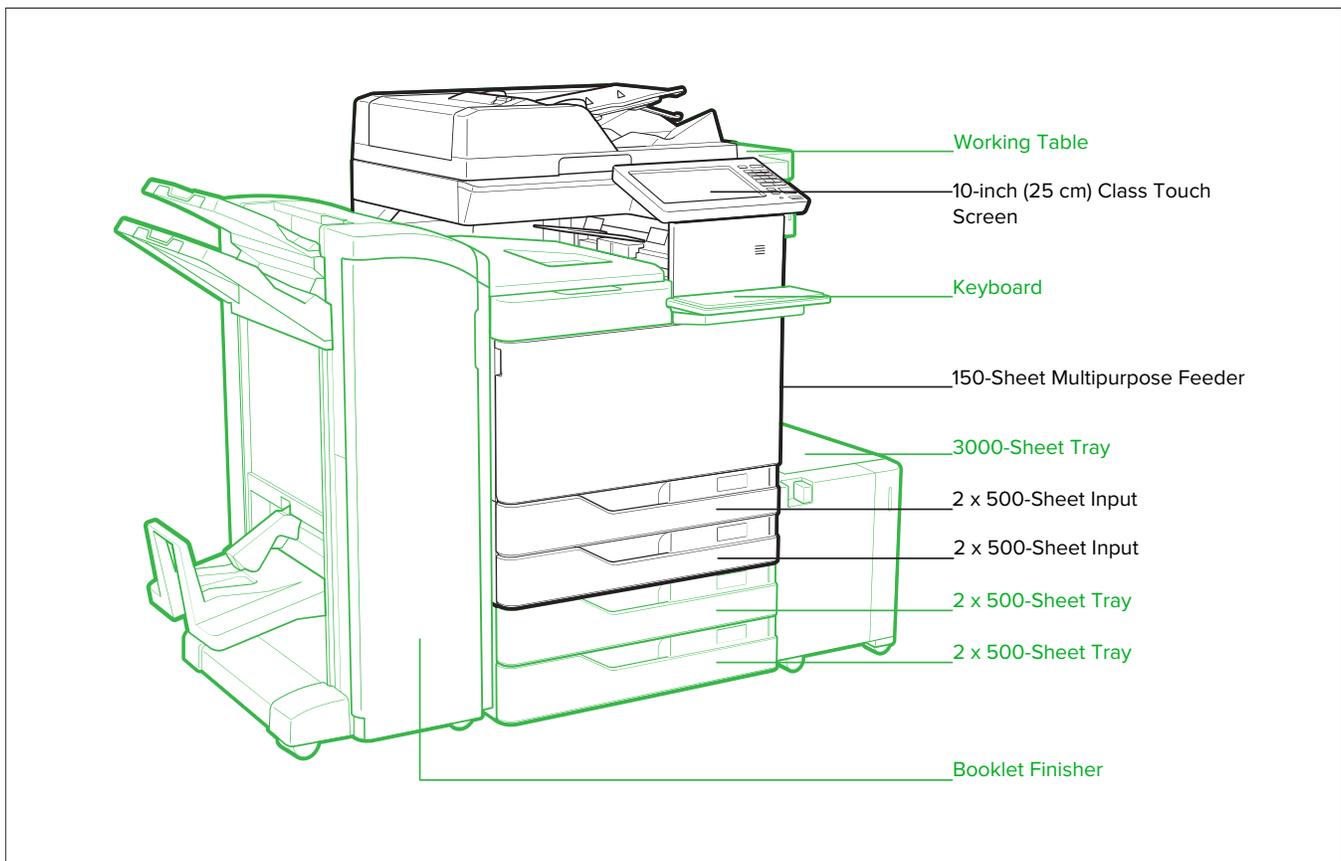

**P/N Toner Cartridges**

76C0PK0	CS/X92x Series, C/XC 9200 Series Black Photoconductor Unit
76C0PV0	CS/X92x, C/XC 9200 Series CMY Photoconductor Unit
25A0013	Staple Cartridges (3 pack)
54G0W00	Waste Toner Bottle

**P/N Paper Handling**

32C0050	CS92x, CX92x de 2 x 500-Sheet Tray
32C0051	CS92x, CX92x de 2500-Sheet Tandem Tray (Letter)
26Z0089	3000-Sheet Tray (A4)
26Z0083	MS911, MX91x Booklet Finisher (3-Hole)
26Z0081	MS911, MX91x Staple Punch Finisher (3-Hole)
26Z0084	MS911, MX910, MX911 Inline Stapler
26Z0088	3000-Sheet Tray
26Z0091	MS911, MX91x Banner Media Tray
26Z0082	CS92x, CX92x, MS911, MX91x Booklet Finisher (4-Hole)
26Z0080	CS92x, CX92x, MS911, MX91x Staple Punch Finisher (4-Hole)

**P/N Furniture**

32C0053	Cabinet with casters
26Z0090	Working Shelf

**P/N Memory Options**

27X0400	500+ GB Hard Disk
57X9020	2GB x32 DDR3 RAM
57X9812	Simplified Chinese Font Card
57X9810	Traditional Chinese Font Card
57X9101	256MB Flash Memory Card
57X9114	Korean Font Card
57X9115	Japanese Font Card

**P/N Application Solutions**

40C9201	Card for IPDS
40C9200	Forms and Bar Code Card
40C9202	Card for PRESCRIBE Emulation
57X0085	Lexmark Secure Element

**P/N Connectivity**

27X0142	Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
57X7050	English Keyboard Kit
27X6510	MarkNet N8370 802.11 a/b/g/n/ac Wireless Print Server
1021231	Parallel Cable (10-foot)
1021294	USB Cable (2-meter)
14F0100	RS-232C Serial Interface Card
14F0000	Parallel 1284-B Interface Card
SPD0001	Surge Protective Device, 110-120V